

DS-KH6320-WTE1


Video Intercom Indoor Station with 7-Inch Touch Screen



Key Feature

- UI V2.0: User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- Standard PoE
- Stores messages and captured pictures in the TF card
- Remote unlocking via the client software or the mobile client
- Views live videos of door stations and linked cameras
- Supports wireless network

Typical Application

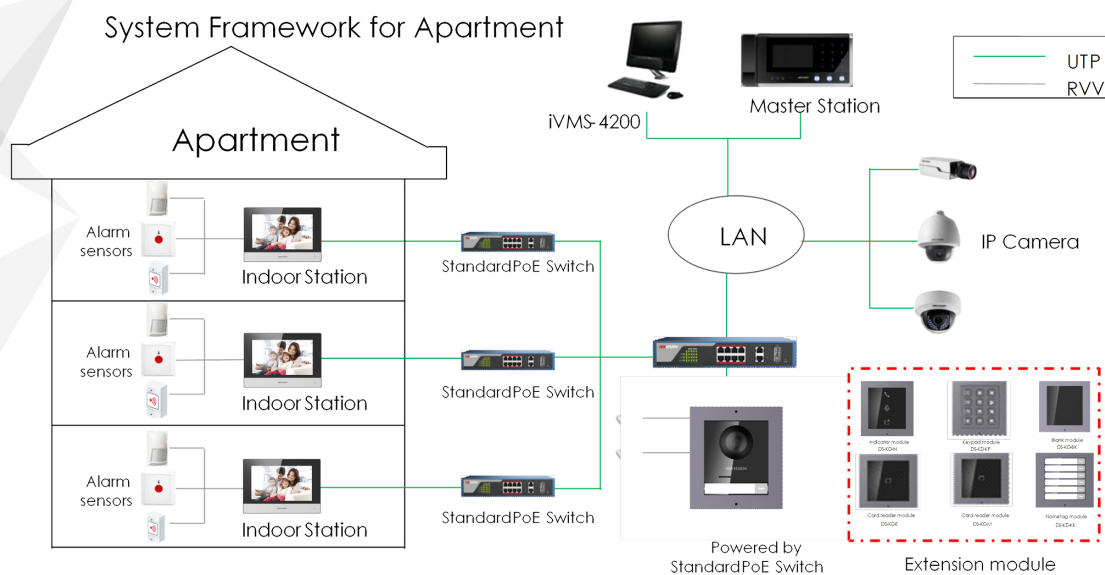

Specification

Model		DS-KH6320-WTE1
System	Memory	128 MB
	Flash	32 MB
	Operation system	Embedded Linux operation system
Display	Display screen	7-inch colorful TFT LCD
	Display resolution	1024 × 600
	Operation method	Capacitive touch screen
Audio	Audio input	Built-in omnidirectional microphone
	Audio output	Built-in loudspeaker
	Audio compression standard	G.711 U
	Audio compression rate	64 Kbps
	Audio quality	Noise suppression and echo cancellation
Network	Wired network	10/100 Mbps self-adaptive network
	Wireless network	Wi-Fi 802.11b/g/n
	Network protocol	TCP/IP、SIP、RTSP
	Network interface	1 RJ-45 10/100 Mbps self-adaptive
	Alarm input	8-ch alarm inputs
	Relay output	2
	TF card	Max to 32 G, SD 2.0 or lower version
	RS-485	1
General	Power supply	IEEE802.3af, standard PoE
		12 VDC/1 A
	Power consumption	≤ 6 W
	Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Working humidity	10% to 90%
Dimensions (W × H × D)		200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")

Available Model

DS-KH6320-WTE1



CENTRAL SECURITY DISTRIBUTION

An Anixter Company

1300 319 499

csd.com.au