

1. Introduction

1.1 Package Contents

Thank you for purchasing PLANET POE-E201 IEEE 802.3at Power over Gigabit Ethernet Extender, your Power over Gigabit Ethernet Extender package shall contain following contents:

Check the contents of your package for following parts:

- IEEE 802.3at Power over Gigabit Ethernet Extender x 1
- User's Manual x 1


If any of these pieces are missing or damaged, please contact your dealer immediately, if possible, retain the carton including the original packing material, and use them against to repack the product in case there is a need to return it to us for repair.

- 1 -

1.3 Technical Specification

Model	POE-E201
Interfaces	
LAN IN	1 x 10/100/1000Base-T Ethernet with IEEE 802.3at / 802.3af PoE "Data + DC" in Auto MDI/MDI-X, Auto-negotiation RJ-45 connector
LAN OUT	1 x 10/100/1000Base-T Ethernet with IEEE 802.3at / 802.3af PoE "Data + DC" out Auto MDI/MDI-X, Auto-negotiation RJ-45 connector
Power over Ethernet	
PoE Standard	IEEE 802.3af Power over Ethernet IEEE 802.3at High Power over Ethernet
PoE Power Supply Type	Mid-Span / Type B
PoE Power Output	52V DC, 510mA, Max. 26 Watts
Power Pin Assignment	4/5(+), 7/8(-)
Maximum Distance	4 units, daisy-chain installation with 500m support

- 3 -

Network Cable	10Base-T: 4-Pair UTP Cat. 5 up to 100m (328ft) 100Base-TX: 4-Pair UTP Cat. 5 up to 100m (328ft) 1000Base-T: 4-Pair UTP Cat. 5e, 6, up to 100m (328ft) EIA/TIA-568 100-ohm STP (100m, 328ft)
Standards Conformance	
Regulation Compliance	FCC Part 15 Class A, CE
Standard Compliance	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3af Power over Ethernet IEEE 802.3at High Power over Ethernet IEEE 802.3x Flow Control
Environment	
Operating	Temperature: -10 ~ 60 Degree C Relative Humidity: 5 ~ 95% (non-condensing)
Storage	Temperature: -40 ~ 85 Degree C Relative Humidity: 5 ~ 95% (non-condensing)
 Note	Distance will often be shorter due to power delivery voltage-drop on the wire. The maximum distances will vary on the quality of the UTP cable and environment.

- 5 -

2.2 Ports Connection

IN Port	Connect the PoE IN port from following 802.3at / 802.3af PSE device through a CAT-5/5e/6 UTP cable: <ul style="list-style-type: none"> • PoE Injector • PoE Injector Hub • PoE Ethernet Switch • Previous POE-E201
OUT Port	Connect the PoE OUT port to following 802.3at / 802.3af PD device through a CAT-5/5e/6 UTP cable: <ul style="list-style-type: none"> • PoE IP Camera • PoE VoIP Phone • PoE Wireless AP • PoE Splitter • Next POE-E201

2.3 LED Definition:

LED	Color	Function
PoE IN	Green	Lights to indicate the port is providing 52-56V (802.3at) / 48V (802.3af) DC in-line power.
LNK/ACT	Green	Lights to indicate the port is link up. Blink: indicate that the extender is actively sending or receiving data over IN port.
PoE OUT	Green	Lights to indicate the port is providing 52-56V (802.3at) / 48V (802.3af) DC in-line power.

- 7 -

1.2 Key Features

- IEEE 802.3at / 802.3af Power over Ethernet compliant
- Complies with IEEE 802.3 / 802.3u / 802.3ab 10/100/1000Base-T
- Extends the range of PoE an additional 100 meters (328ft.)
- Auto-detect and protect of PoE equipment from being damaged by incorrect installation
- Multiple units, daisy-chain installation support
- Forwards both Ethernet data and PoE power to remote device
- No external power cable installation required
- Compact size, Wall-mountable design
- Plug-and-Play installation


- 2 -

Hardware Specification	
Data Rate	10/100/1000Mbps
Switch Architecture	Store-and-Forward
Switch Throughput	10Mbps: 14880pps@64Bytes 100Mbps: 148810pps@64Bytes 1000Mbps: 1488000pps@64Bytes
Maximum Frame Size	1552Bytes
Flow Control	Back pressure for Half-Duplex IEEE 802.3x Pause Frame for Full-Duplex
LED Indicators	<ul style="list-style-type: none"> • 1 x PoE IN (Green) • 1 x LAN Data (Green) • 1 x PoE OUT (Green)
Protection	ESD (Ethernet): 2KV (TBD) Surge (EFT for power): 2KV (TBD)
Dimension (W x D x H)	94 x 70 x 26 mm
Weight	197g
Power Requirement	IEEE 802.3at compliant with voltage within 52V-56V DC
Power Consumption	3.2 Watts (system maximum)
Mechanical	Metal / Wall Mountable

- 4 -

2. Hardware Description

2.1 Product Outlook

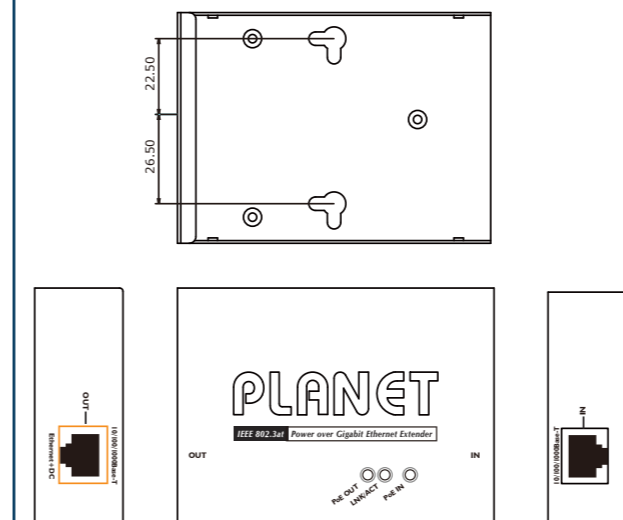

- 6 -

3. Hardware Installation

This product provides three different running speeds – 10Mbps, 100Mbps and 1000Mbps in the same device and automatically distinguishes the speed of incoming connection.

This section describes the hardware features of POE-E201. Before connecting any network device to the POE-E201, read this chapter carefully.

3.1 Before Installation

Before your installation, it is recommended to check your network environment. If there is any far away IEEE 802.3at / 802.3af devices need to power on, the POE-E201 can provide you a way to supply power for this Ethernet device conveniently and easily.

The POE-E201 is installed between the PSE (Power Source Equipment) and the PD (Powered Device); it is powered by PSE and forwards the Ethernet data and remaining PoE power to the PD. The POE-E201 doesn't require an external power supply and it can be installed easily just plug and play; that means the operator does not need to configure the POE-E201. The POE-E201 injects power to the PDs without affecting the data transmission performance. It offers a cost effective and quick solution to extend power and data an additional 100m.

- 8 -



1. To provide you better PoE power and data extension quality, we strongly recommend that you use "Solid UTP Cable" when installing POE-E201.
2. The POE-E201 can be installed with third-party device if the device complied with IEEE 802.3at / 802.3af standard.

3.2 Connect POE-E201 to the Power Source Equipment (PSE)

There are 2 RJ-45 ports in the PoE Extender, of which the "IN" port functions as "PoE (Data and Power) input" and the "OUT" port on the other side functions as "PoE (Data and Power) output".

Step 1: Connect a standard Cat.5/5e/6 UTP cable from **Power Source Equipment (PSE)**, such as PoE Switch, PoE Injector hub and single port PoE injector, to the "IN" port of POE-E201.

Step 2: The PSE delivers both Ethernet Data and PoE power over UTP cable to the POE-E201 and the "PoE IN" LED will be steady on.



1. The POE IN LED turn on steady green means POE-E201 is being powered successfully with PoE class 0.
2. If POE IN LED does not turn on, please check the remote PSE or the cable with a PC or a network device to see if the cable is correct. Or with an IEEE 802.3at / 802.3af device such as the target PD to check the power injection is correct either.

3.4 Multiple PoE Extender Installation


The POE-E201 PoE Extender supports multiple units, daisy-chain installation. They can be employed in series for even longer distances based on remote PoE IP Camera or PoE Wireless Access Point power requirement.

Step 1: Connect the additional Cat.5/5e/6 cable from the "OUT" port of the first POE-E201, the other end of the UTP cable be used to connect to the "IN" port of remote / next POE-E201.

Step 2: The "PoE OUT" LED indicator of the first POE-E201 will be steady to shows it is providing power to next PoE Extender.

Step 3: The "PoE IN" LED on the next POE-E201 will steady on.

Step 4: Connect the additional Cat.5/5e/6 cable to the remote PoE powered device to the "OUT" port of next or third POE-E201.

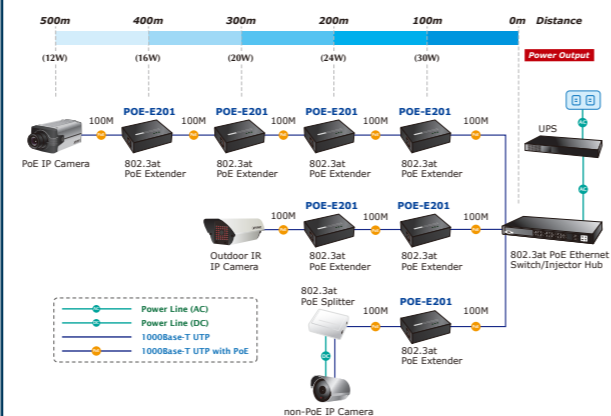


1. Per POE-E201 will take 3.2 Watts maximum for the system itself, please check the total power consumption of your IEEE 802.3at / 802.3af PD and the POE-E201 before you make the daisy-chain connection. If the overall power consumption is overloaded, the local PSE could shutdown the whole power system.
2. Per POE-E201 cable segment is limited in 100 meters Cat.5/5e/6 UTP wire from its IN/OUT port to the other data end, use of any other non standard cable or over distance could results in unstable connection.

3.3 Connect POE-E201 to the Powered Device (PD)

Step 3: Connect the additional Cat.5/5e/6 cable that will be used to connect to the remote **Powered Device (PD)** to the "OUT" port of POE-E201.

Step 4: The "OUT" port is also the power injectors which transmit DC Voltage to the Cat.5/5e/6 cable and transfer data and power simultaneously between the PSE and PD.

Step 5: Once POE-E201 detects the existence of an IEEE 802.3at / 802.3af device, the "PoE OUT" LED indicator will be steady, ON to shows it is providing power.

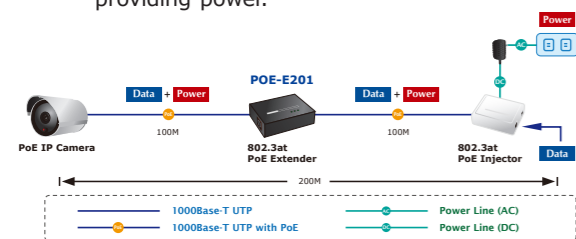


1. If the connected device is not fully complying with IEEE 802.3at / 802.3af standard or in-line power device, the PoE OUT LED indicator of POE-E201 will not be steady on.
2. According to IEEE 802.3at / 802.3af standard, the POE-E201 will not inject power to the cable if not connecting to a standard IEEE 802.3at / 802.3af device.



802.3at Power over Gigabit Ethernet Extender POE-E201

Cost-effective PoE Range Extension Solution

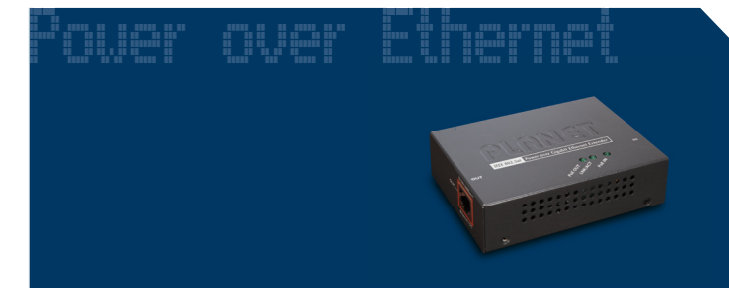


User's Manual




3.5 Optional - DIN-Rail Mounting

There are two DIN-Rail holes on the left side of the POE-E201 that allows the Extender can be easily installed with DIN-Rail mounting. The PLANET optional DIN-Rail mounting Kit - RKE-DIN can be order separately. When need to replace the wall mount application with DIN-Rail application on the POE-E201, please refer to following figures to screw the DIN-Rail on the Extender. To hang the POE-E201, follow the below steps:


Step 1: screw the DIN-Rail on the POE-E201.

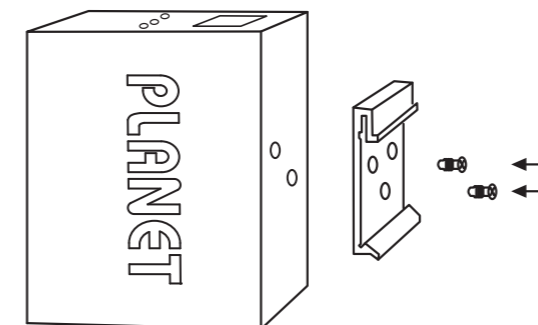

Step 2: Lightly press the button of DIN-Rail into the track.

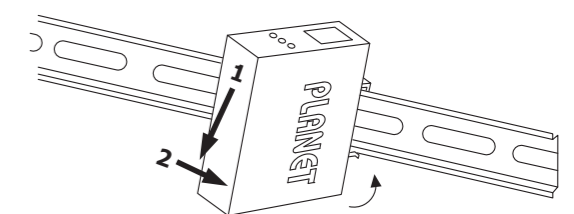

Step 3: Check the DIN-Rail is tightly on the track

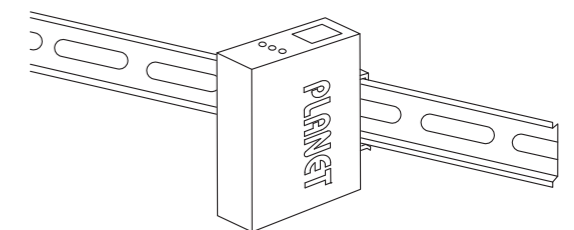

You must use the screws supplied with the mounting brackets. Damage caused to the parts by using incorrect screws would invalidate your warranty.